

WAVASORB® FS

Advanced Flat Sheet Absorber

WITH RESPECT FOR THE ENVIRONMENT: REACH & RoHS COMPLIANT




- ✓ WAVASORB® FS is a series of flat, carbon-loaded, urethane-foam absorbers.
- ✓ Applied to line corners of anechoic chambers.
- ✓ Certified to all fire-retardancy and environmental specifications by containing an advanced chemical composition.
- ✓ Designed and quality controlled using commercial and original simulating and test techniques.

WAVASORB® FS

Manufacturing & Installation Methods

WAVASORB® FS is typically bonded to metallic surfaces using E&C Adhesive 13111.

For easy exchange, modular installation techniques are available using velcro-fasteners or plate & rail mounting to achieve perfect geometry and alignment, compatible with any type of shielding.

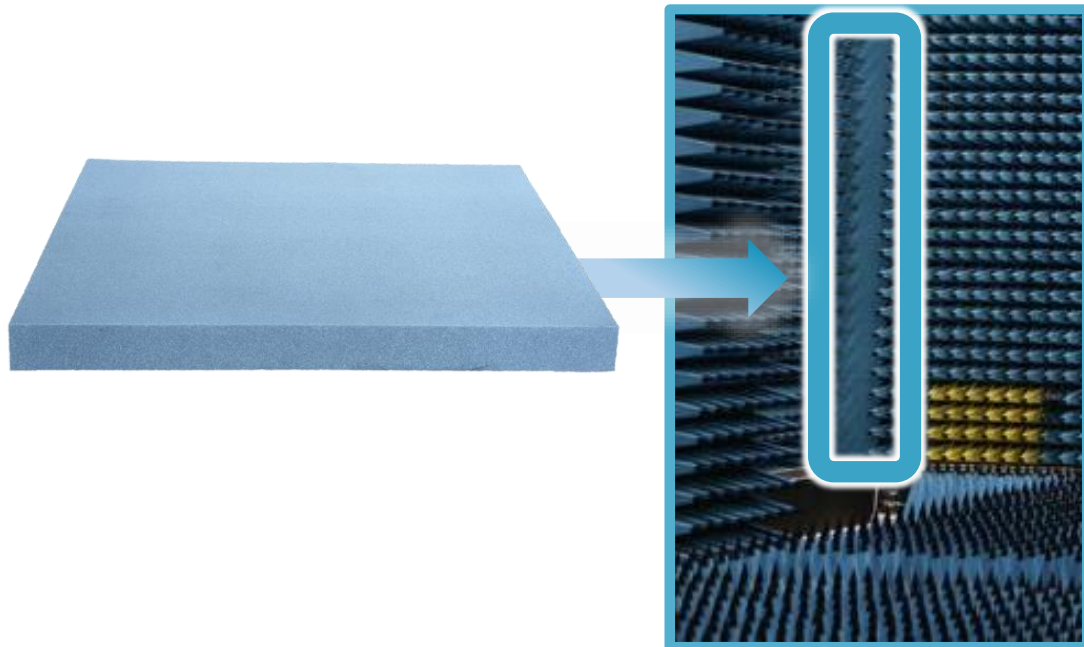

Picture was taken from
TÜBITAK GEBZE FACILITIES

Applications

WAVASORB® FS is the preferred solution for the anechoic chamber lining of corners and complex areas in:

- ✓ Far-Field & Near-Field facilities;
- ✓ Compact Antenna test ranges;
- ✓ Rader Cross Section (RCS) facilities;
- ✓ Electronic Warfare (EW) test ranges;
- ✓ Wireless Over-The-Air (OTA) measurement systems.

Measurement Techniques

WAVASORB® FS is manufactured in well-defined batches, and their fire-retardant properties are monitored following internal ISO 9001 procedures.

*Sizes of our WAVASORB® FS can easily be customized to fit any specific project area.
Multiple variables go with our WAVASORB® FS-absorbers,
e.g. plastic coating, painting/coating colours, self-adhesive tape factory-installed, ...
For more information contact your local sales representative.*

WAVASORB® FS

Characteristics

Handling Temperature ⁽¹⁾	+5°C to +35°C
Humidity Range	30% to 70%
Fire Retardancy Tests	According to: - UL-94-HBF - ISO 4589 - EN 13501 Class E; ISO 11925-2 - DIN 4102-1 Class B2 - NRL 8093 Tests 1, 2 and 3
Environmental Testing	Compliant with: - IEC 60068-2-1 - IEC 60068-2-78 - AATCC 30-IV (2004)
REACH compliant	According to EC 1907/2006
RoHS compliant	According to 2015/863/EU
Quality control	IEEE Standard 1128 ISO 9001
Product life	+25 years under controlled environment

⁽¹⁾ Depending on the application, the absorber can withstand temperatures of +90°C, for more information, contact your local sales representative.

Physical properties


	Standard Color ⁽¹⁾	Standard footprint
WAVASORB® FS-20 / FS-25 / FS-50 FS-100 / FS-150 / FS-200	Light blue	61 cm x 61 cm

⁽¹⁾ Various colours available on request

	Total height ⁽¹⁾ (cm)	Average weight ⁽²⁾ (kg)
WAVASORB® FS-20	2,0	0,6
WAVASORB® FS-25	2,5	0,8
WAVASORB® FS-50	5,0	1,5
WAVASORB® FS-100	10,0	2,5
WAVASORB® FS-150	15,0	4,0
WAVASORB® FS-200	20,0	5,0

⁽¹⁾ The above-mentioned dimensions have a tolerance of +/- 6 mm

⁽²⁾ Weight values are subject to change

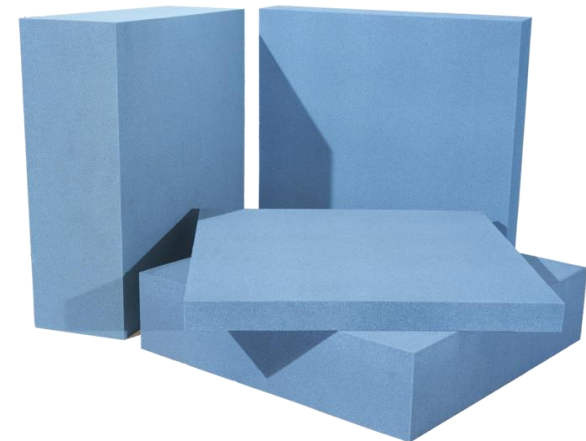

■
E&C Anechoic Chambers nv
Nijverheidsstraat 7A
B-2260 Westerlo
Belgium

Tel.: +32 14 59 58 00

sales@ecac.be
www.ecac.be

■
Albatross Projects RF Technology
India Pvt. Ltd
312, Siddhraj Zori, Near Sargasan Cross, KH-0,
Off S.G. Highway
Gandhinagar, 382421
India

Tel.: +91 97 3737 9537
Fax: +91 79 2975 0780

info@albatross-projects.in
www.albatross-projects.in

■
E&C Anechoic Chambers Asia Ltd.
7K King Palace Plaza,
55 King Yip Street, Kwun Tong
Kowloon, Hong Kong

Tel.: +852 3975 9871

asia-sales@ecac.be
www.ecac.be

■
Albatross Projects RF Technology
(Shanghai) Co., Ltd.
Block 35, No. 100 Baise Road
Inside Grand Skylight Gardens Hotel
200231 Shanghai
P.R. China

Tel.: +86 21 6434 1110
Fax: +86 21 6434 7800

info@albatross-projects.com.cn
www.albatross-projects.com.cn

■
Albatross Projects GmbH
Daimlerstrasse 17
89564 Nattheim
Germany

Tel.: +49 7321 730 500
Fax: +49 7321 730 590

info@albatross-projects.com
www.albatross-projects.com

■
AP Americas Inc.
3101 Skyway Circle N.
75038 Irving, Texas
USA

Tel.: +1 972 295 9100
Fax: +1 972 810 3223

info@apamericas.com
www.apamericas.com

Shaping

the future



www.ecac.be

Safety Considerations: It is recommended to consult the E&C ANECHOIC CHAMBERS product literature, including material safety data sheets, prior to use E&C ANECHOIC CHAMBERS products. These may be obtained from your local sales office.

Warranty: Values shown are based on testing of laboratory test specimens and represent data that falls within the normal range of properties of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material or any use contemplated by the user and the manner of such use is the sole responsibility of the user who must assure that the material as subsequently processed meets the needs of this particular product or use.

We hope the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use which would infringe any patent or copyright.